



THE DRIVELINE EXPERTS



ShaftSwap[®]

Interaxle Driveshafts

- N170 and 1710 Series
- An economic alternative to stocking multiple Interaxle driveshaft assemblies
- Made in the U.S.A.
- Designed, engineered, and manufactured to industry OEM standards
- Improves customer satisfaction by minimizing downtime



Manufacturing Driveline Solutions[®]
in the USA Since 1921.


NeapcoAftermarket.com

ShaftSwap®


Interaxle Driveshafts

Product features, advantages, and benefits include:

- Thick wall DOM tubing for enhanced strength and durability
- High-angle yokes allow for up to 45 degree angles
- N1710 With just five part numbers Neapco ShaftSwap interaxle shafts cover 134 OE part number applications
- N170 With just five part numbers Neapco ShaftSwap interaxle shafts cover 96 OE part number applications
- Painted and balanced

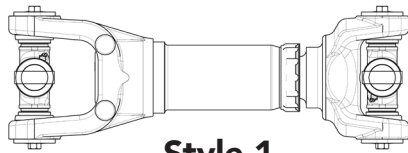


Style 1

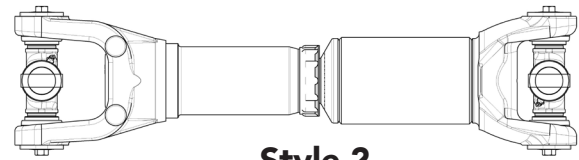


Style 2

STYLE	PART#	SERIES	ADDITIONAL DETAILS
1	N1710IA-1722HR	1710	Allows for 5.5" travel 17.22" collapsed length to 22.72" extended length
1	N1710IA-1825HR	1710	Allows for 5.5" travel 18.25" collapsed length to 23.75" extended length
2	N1710IA-2028HR	1710	Allows for 5.0" travel 20.28" collapsed length to 25.28" extended length Includes 2.5" of 4.095" x .180 tube welded to stub shaft and weld yoke
2	N1710IA-2200HR	1710	Allows for 5.0" travel 22.00" collapsed length to 27.00" extended length Includes 4.25" of 4.095" x .180 tube welded to stub shaft and weld yoke
2	N1710IA-2400HR	1710	Allows for 5.0" travel 24.00" collapsed length to 29.00" extended length Includes 6.25" of 4.095" x .180 tube welded to stub shaft and weld yoke

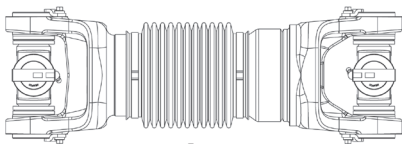

Style 3

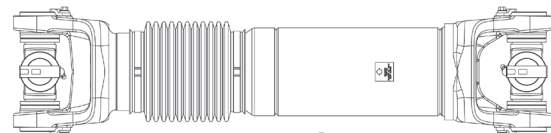

Style 4

STYLE	PART#	SERIES	ADDITIONAL DETAILS
3	N170-IAD-1747	N170	Allows for 5.90" travel 17.47" collapsed length to 23.37" extended length
4	N170-IAD-2012	N170	Allows for 4.33" travel 20.12" collapsed length to 24.45" extended length Includes 2.63" of 4.73" X .197" tube welded to stub shaft and weld yoke
4	N170-IAD-2200	N170	Allows for 4.33" travel 22.00" collapsed length to 26.33" extended length Includes 4.50" of 4.73" X .197" tube welded to stub shaft and weld yoke
4	N170-IAD-2400	N170	Allows for 4.33" travel 24.00" collapsed length to 28.33" extended length Includes 6.50" of 4.73" X .197" tube welded to stub shaft and weld yoke
4	N170-IAD-2642	N170	Allows for 4.33" travel 26.42" collapsed length to 30.75" extended length Includes 8.88" of 4.73" X .197" tube welded to stub shaft and weld yoke